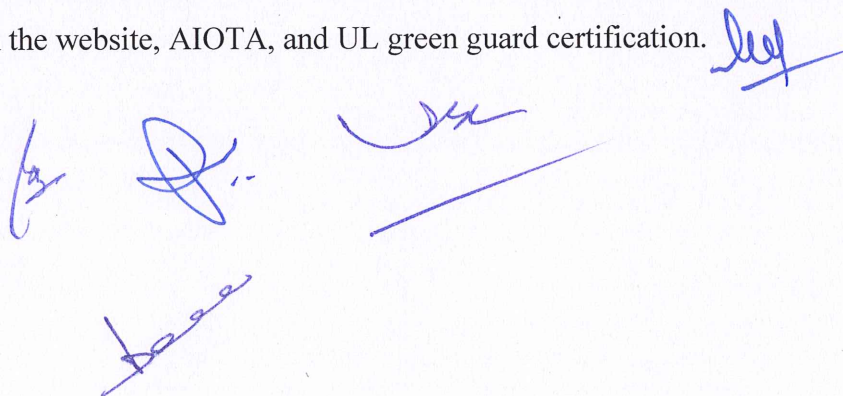


### SPECIFICATIONS FOR OFFICE TABLE

- 1) Provide the main table with an overall size of the table equal to 1350 x 600 x750mm approx. The table is made of at least 25 mm thick MDF – one side pre-laminate board with at least 0.4 mm PVC membrane pressed onto top.
- 2) Grommet provided on the work surface for wire management. The modesty panel is made of at least 25 mm thick MDF – one side pre-laminate board with a at least 0.4 mm PVC membrane pressed onto top.
- 3) The understructure is made of at least 25 mm thick pre-laminated twin board of E1-P2 grade and approved shade edge banded with matching 2 mm thick PVC lipping. The Hinge door unit is made of at least 25 mm thick pre-laminated twin board of E1-P2 grade and approved shade edge banded with matching 2 mm thick PVC lipping.
- 4) Handles are provided for ease of opening. Pedestals are provided with a lock for security. The Colour of the table should be in two shade combination of white and teak.
- 5) Product should carry the UL Green guard certificate and should reflect on the website for validation, the certificate along with the test report, OEM specification sheet and reference image to be attached to the technical bid. Which could be verified at the time of the technical bid.
- 6) The manufacturer shall have quality and safety assurance like ISO-9001:2015, ISO-14001:2015 and ISO-18001:2007, ISO13485, BIFMA Level at least one product reflecting on the website, AIOTA, and UL green guard certification.

The image shows several handwritten signatures in blue ink. There are five distinct signatures scattered across the lower half of the page. One signature is located to the right of the text in item 6, and the others are clustered below it.