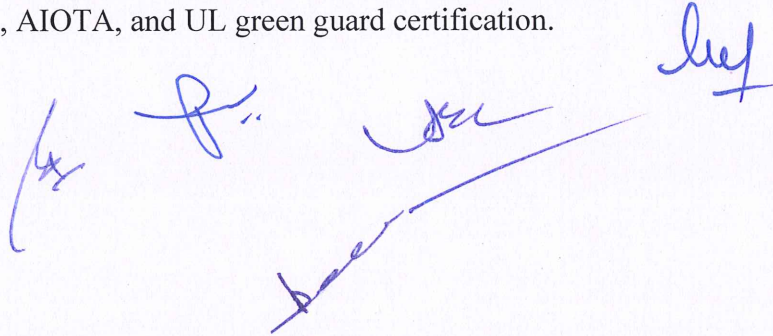


SPECIFICATIONS FOR BOOKCASE

1. The storage unit has a cam lever lock with a common key with 4 Doors and a scissor mechanism for receding inside the top of the respective component.
2. The Thickness of the MS Sheet used for the Shutter and shelf is 0.8 mm and 0.7 mm for the top, bottom, back and sides.
3. Overall dimension is approx. 1742 mm (H)*914 mm(W)*305mm(D).
4. The thickness of transparent glass I shutter is 4.0mm and it's ash grey powder coated.
5. . Product should carry a UL Green guard certificate and should reflect on the website for validation, the certificate along with the test report, OEM specification sheet and reference image to be attached to the technical bid. Which could be verified at the time of the technical bid.
6. The manufacturer shall have quality and safety assurance like ISO-9001:2015, ISO-14001:2015 and ISO-18001:2007, ISO13485, BIFMA Level at least one product reflecting on the website, AIOTA, and UL green guard certification.

A series of handwritten signatures in blue ink, including a large signature that spans across the bottom of the list items and several smaller, more distinct signatures to its right.