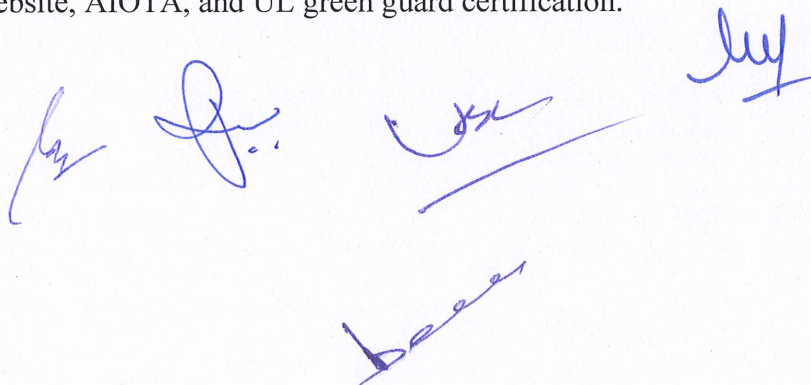


SPECIFICATIONS FOR ALMIRAH

1. The complete steel structure shall be constructed by welding and provide finishing with epoxy-polyester powder coated to be thickness 50-60μ.
2. The overall size of the Almirah shall be 915mm (W) X 485mm (D) X 1980mm (H) including the legs. It should be supplied with 4 nos. of adjustable shelves i.e. 5 loading compartments.
3. Door shall be made of 1mm thick and all other components shall be made of 0.8mm thick high yield strength CRCA sheet of grade 'D' confirming to IS: 513. Stiffeners shall be provided on the shelf & door.
4. The steel hinged door shall be provided with a locking mechanism which is assembled with bolt arrangement. The shelves shall have folded constructions which have intrinsic rigidity and high load carrying capacity.
5. Almirah should carry UL Green guard certificate and should reflect on the website for validation, the certificate along with the test report, OEM specification sheet and reference image to be attached to the technical bid. Which could be verified at the time of the technical bid.
6. The manufacturer shall have quality and safety assurance like ISO-9001:2015, ISO-14001:2015 and ISO-18001:2007, ISO13485, BIFMA Level at least one product reflecting on the website, AIOTA, and UL green guard certification.

Five handwritten signatures in blue ink are present below the list. They are arranged in a horizontal row, with the first four signatures being relatively compact and the fifth signature on the right being more elongated and stylized. Below the first three signatures, there are additional scribbles and lines, possibly indicating corrections or further markings.