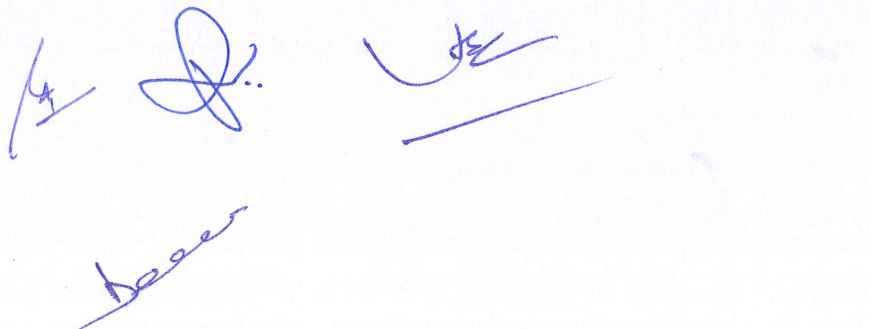


## SPECIFICATIONS FOR MULTI-PURPOSE DELUXE CRASH CART

1. Overall dimension of L 855 W 405 H 1520 mm.
2. SS 304 grade made a top sheet with 2mm thickness should be used. The Middle & bottom sheet should be used made of SS 304 grade with a thickness of 1mm. SS 304 grade frame bar with a section of 25.4, 19, 1.2 & 16mm should be used.
3. MS plated Cylinder case should be used welded with cylinder holding unit to hook giving the curve bend at the bottom to hold the cylinder.
4. SS 304 grade pipe of section 12mm should be used to provide provision to mount the IV rod.
5. High endurance anti-static, plastic injected moulded 4 swivel castors of dia 125mm should be used & should have provision for diagonal locking.
6. SS 304 handle pipe should have a section of 25.4mm with a length of 365mm & should have a thickness of 1.2mm giving a glossy finish.
7. SS 304 tubular frame should have five different coloured removable bins mounted on the top shelf and two polystyrene lockable storage units with three drawers each.
8. The top drawers should have containers of different sizes.
9. Thermosetting epoxy polyester with semi-gloss finish powder coating must be used.
10. Safe working load must be 50 kg.
11. Should have necessary quality certificates like ISO/ BIS etc.

The image shows several handwritten signatures in blue ink. One signature is located to the right of item 11, and three others are clustered below it. The signatures are stylized and appear to be initials or names.